



Horizontal packing machine




Max film width	250mm
Packing capacity	40-230 bags/minute
Suitable film thickness	0.03-0.06 mm
Bag length	65-190mm
Max bag width	55mm
Packing height	Max 40mm
Total power:	2.4KV, 220v
Overall dimension	3800x800x1500mm
Weight	600 kgs

Features:

1. Double inverter control, bag length that is set to cut, no need to adjust the empty walk, step in place, save time and save the film
2. Man-machine interface, parameter setting convenient and quick.
3. Fault diagnosis function, fault display at a glance.
4. High sensitivity photoelectric eye color mark tracking, digital input sealing and cutting position, the seal position more accurate
5. Temperature independent PID control, better for a variety of packaging materials.
6. positioning stop function, non-stick knife, do not waste the capsule.
7. Drive system is simple, more reliable, more convenient maintenance.
8. All controls are implemented by software to facilitate functional adjustment and technology upgrades

Working principle:

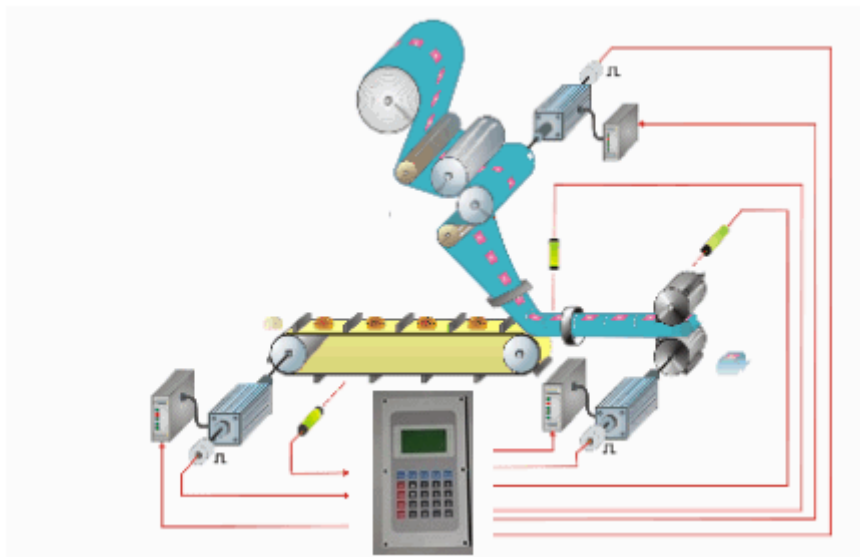

Packing sample:

